

# G712-Pro Data Sheet

## G712-Pro

3-way High Power  
Full Range Multidesign



The CODA G712-Pro is a versatile full range three-way loudspeaker system that features a high power 12" neodymium woofer and a 1.4" mid/high coaxial neodymium driver coupled to a 90°x60° rotatable elliptical waveguide.

As a three-way system the G712-Pro may be driven passively or with bi-amplification to provide extremely high output.


The CODA G712-Pro is a powerful solution for front of house touring, installed PA for theatres, clubs and corporate events or as a stage monitor.

### G712-Pro Features

- ⊕ 3-way high output versatile full range system
- ⊕ Unique 1.4" mid/high coaxial neodymium driver
- ⊕ 90° x 60° rotatable elliptical waveguide
- ⊕ 12" neodymium ultra low distortion woofer with passive or bi-amplified operation
- ⊕ Designed for fixed installation, touring and stage monitoring







# G712-Pro Data Sheet

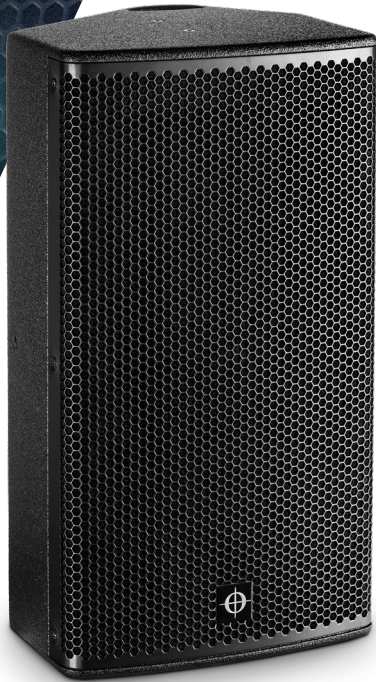

Product type:	3-way full range system, multidesign enclosure
Dimensions (WxHxD):	348 x 630 x 320 mm / 13.7 x 24.8 x 12.6"
Dimensions including hardware (WxHxD):	N/A
Net weight:	21.5 kg / 47.4 lbs
Frequency response:	60 Hz – 23 kHz (-6 dB)
Power handling AES / peak (passive):	1000 W / 4000 W
- Low AES / peak:	N/A
- Mid / High AES / peak:	150 W / 1300 W
Max. peak SPL (with LINUS10):*	143 dB
Dispersion horizontal:	90°
Dispersion vertical:	60°
Components Low frequency:	12" neodymium woofer, 4" (101.6 mm) voice coil, 1000 W (AES)
Components Mid/High frequency:	1.4" neodymium coaxial driver, 3.5" (90 mm) + 1.75" (44.4 mm) voice coil, 150 W + 80 W (AES)
Crossover point:	750 Hz, 6.3 kHz passive
Input connectors:	2 x Neutrik™ NL4MP
Nominal impedance LF / MF+HF:	8 Ω (+1/-1)
Enclosure material:	Birch plywood
Suspension:	M6 and M8 threaded points for use with optional U-bracket

\*Measured with pink noise 6 dB crest factor. Half-space loading.

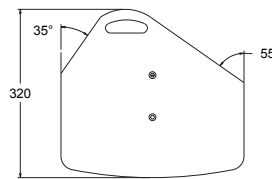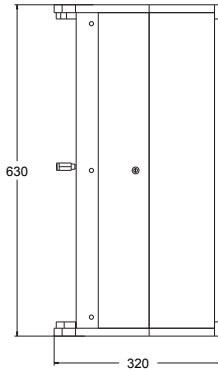

## Other G-Series Related Products



### G15-SUB

Compact, High-Output Subwoofer



### G18-SUB

Extended Low Frequency Subwoofer



### LINUS10-C

4-Channel Loudspeaker Management Amplifier

## CODA AUDIO GmbH

Boulevard der EU 6, 30539 Hannover, Expo Park, Germany

E-Mail: [contact@codaaudio.com](mailto:contact@codaaudio.com) Website: [www.codaaudio.com](http://www.codaaudio.com)

**CODA**  
CODA AUDIO

